

## COPPER-PHOSPHORUS ALLOYS

- Excellent fluidity
- High capillarity on small gaps
- Good control for joint filling
- Guaranteed melting point  $\pm 3^{\circ}\text{C}$


**Selectarc**  
BRAZING




## SCHEMATIC REPRESENTATION OF THE CAPILLARY - ACTION OF PHOSBRAZ® (CuP) ALLOYS



IN CASE OF SMALL CLEARANCES (such as < 0,05 mm)

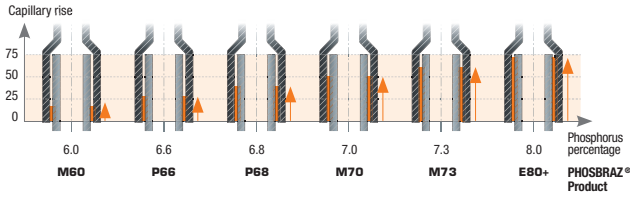

IN CASE OF LARGE CLEARANCES (such as > 1 mm)

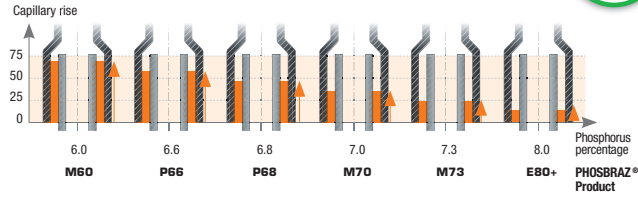


Non-contractual drawings.

### SELECTION CRITERIA BASED ON FLUIDITY OF THE CuP ALLOY RANGE

Reference	Fluidity	Characteristics
PHOSBRAZ E80+    PHOSBRAZ 675Sn	VERY HIGH FLUIDITY ●●●●●	These alloys melt at low temperature. Joints with very small clearances.
PHOSBRAZ E80	HIGH FLUIDITY ●●●●	This alloy melt at low temperature. Joints with very small clearances.
PHOSBRAZ M70    PHOSBRAZ M73	GOOD FLUIDITY ●●●	These grades are used for brazing of couplings and connectors. Standard clearances.
PHOSBRAZ P66    PHOSBRAZ P68	INTERMEDIATE FLUIDITY ●●	Brazing of joints in position.
PHOSBRAZ M60    PHOSBRAZ V6	VISCOUS ●	Recommended for tube-assembly by pitting.

### SELECTION CRITERIA: MELTING POINT / WORKING TEMPERATURE

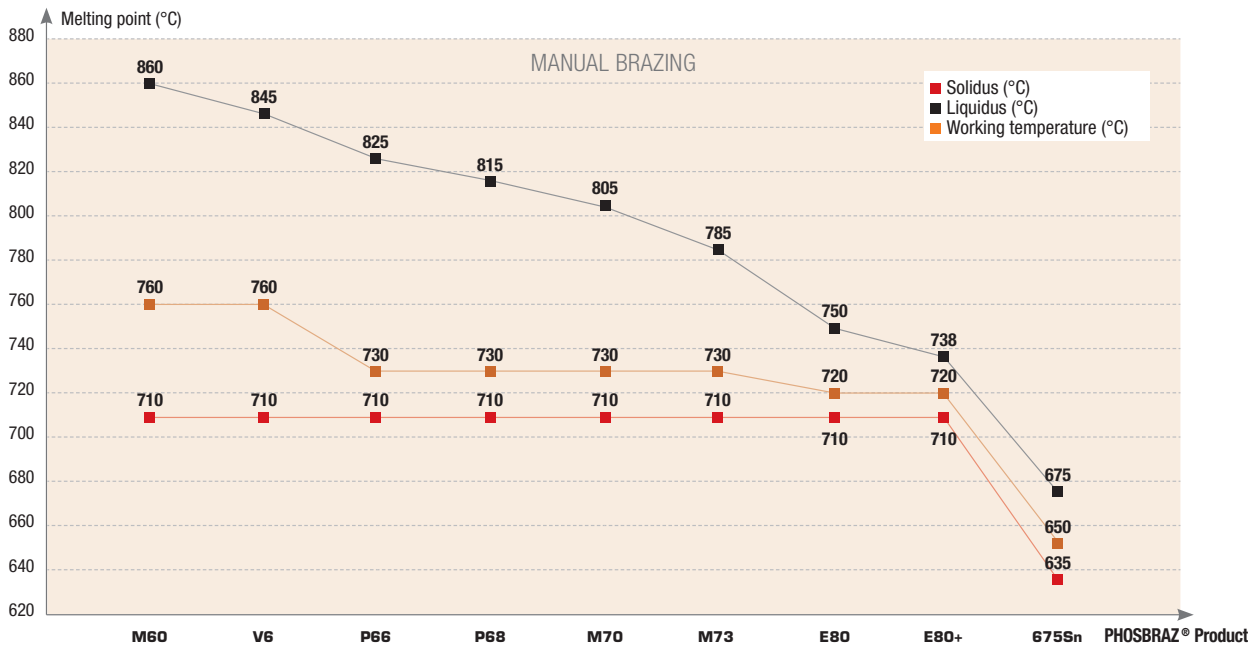

Type	Technical characteristics			Chemical composition					
	Solidus (°C)	Liquidus (°C)	Working temperature (°C)	Rm (MPa)	A (%)	P (%)	Sn (%)	Cu (%)	
PHOSBRAZ M60	710	860	760	550	6	6	-	Balance	
PHOSBRAZ V6	710	845	760	550	5	6.3	-	Balance	
PHOSBRAZ P66	710	825	730	500	4	6.6	-	Balance	
PHOSBRAZ P68	710	815	730	450	4	6.8	-	Balance	
PHOSBRAZ M70	710	805	730	450	4	7	-	Balance	
PHOSBRAZ M73	710	785	730	450	4	7.3	-	Balance	
PHOSBRAZ E80	710	750	720	450	3	7.8	-	Balance	
PHOSBRAZ E80+	710	738	720	450	2	8	-	Balance	
PHOSBRAZ 675Sn	635	675	650	350	2	6.75	7	Balance	



Reboud-Roche, 4 rue de la Fonderie, FR - 25220 Roche-Lez-Beaupré

> tel. : +33 3 81 60 51 72 > fax : +33 3 81 57 02 75

> info@fsh-welding.com > www.fsh-welding.com

